



BOMBAS VANBRO LTDA

SAPUCAIA DO SUL - RS


BRASIL

BOMBA SUMERGIBLE MODELO VBOP62


EMPLEO: POZO PROFUNDO Ø6"

(DIÁM. 140mm 50HZ 2900RPM)

TABLA DE RENDIMIENTOS

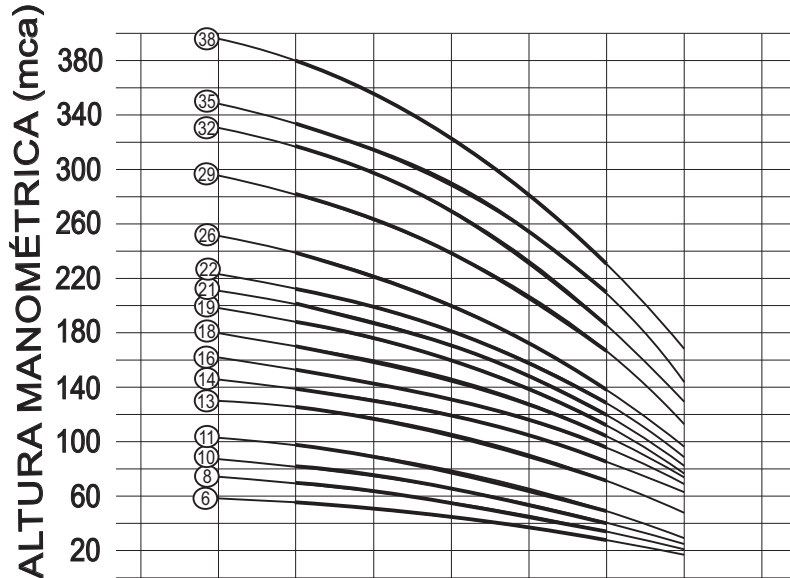

○ Nº ETAPAS

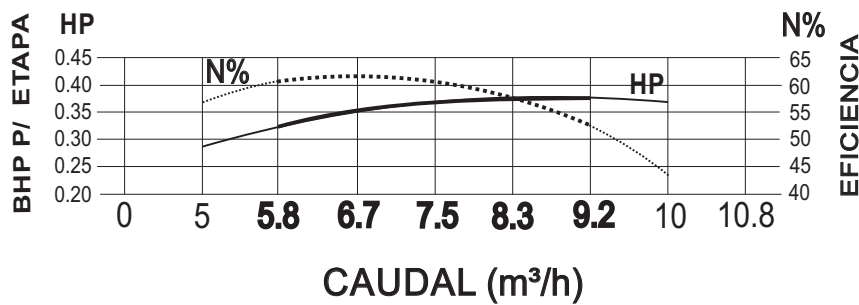

MODELO	MOTOR	E	HP	CAUDAL Y ALTURA MANOMÉTRICA TOTAL										m³/h
				0	5	5.8	6.7	7.5	8.3	9.2	10	10.8		
VBOP.62X.06.025.Y	VMUP	6	2.5	68.3	58.2	55.0	50.2	44.8	37.8	28.8	17.8	9.9	METROS	
VBOP.62X.08.030.Y	VMUP	8	3.0	85.1	73.2	69.3	63.8	56.3	47.6	35.6	20.8	11.3		
VBOP.62X.10.035.Y	VMUP	10	3.5	102.0	87.6	82.8	75.5	67.1	56.8	42.5	24.9	13.5		
VBOP.62X.11.045.Y	VMUP	11	4.5	120.3	103.7	98.1	90.5	80.0	67.7	50.8	29.9	16.1		
VBOP.62X.13.050.Y	VMUP	13	5.0	138.9	130.1	124.2	115.9	105.6	91.5	74.7	48.4	18.2		
VBOP.62X.14.055.Y	VMUP	14	5.5	155.4	146.6	140.5	132.1	120.0	105.7	85.3	62.7	20.4		
VBOP.62X.16.060.Y	VMUP	16	6.0	173.8	163.4	155.8	145.6	132.3	115.1	93.2	67.4	22.6		
VBOP.62X.18.065.Y	VMUP	18	6.5	189.6	179.5	172.0	161.8	147.3	130.0	104.9	71.6	25.4		
VBOP.62X.19.070.Y	VMUP	19	7.0	206.3	197.6	187.0	175.5	160.6	141.9	115.5	77.0	28.9		
VBOP.62X.21.080.Y	VMSP	21	8.0	223.9	212.4	203.8	187.4	171.5	150.9	122.8	82.6	35.4		
VBOP.62X.22.090.Y	VMSP	22	9.0	243.1	223.3	213.4	198.6	181.6	159.5	130.9	88.0	40.7		
VBOP.62X.26.100.Y	VMSP	26	10.0	276.5	251.2	239.6	221.0	199.9	173.6	140.6	97.1	47.2		
VBOP.62X.29.110.Y	VMSP	29	11.0	308.0	293.7	279.3	260.8	239.1	206.9	165.6	114.7	55.9		
VBOP.62X.32.120.Y	VMSP	32	12.0	348.7	330.0	314.6	295.9	269.5	233.2	189.4	129.8	64.9		
VBOP.62X.35.130.Y	VMSP	35	13.0	375.0	357.6	340.2	318.2	291.4	249.2	205.0	145.5	69.1		
VBOP.62X.38.150.Y	VMSP	38	15.0	421.9	394.5	381.9	355.0	323.7	285.2	233.0	169.4	84.7		