



BOMBAS VANBRO LTDA

SAPUCAIA DO SUL - RS


BRASIL

BOMBA SUMERGIBLE MODELO VBOP64


EMPLEO: POZO PROFUNDO Ø6"

(DIÁM. 140mm 50HZ 2900RPM)

TABLA DE RENDIMIENTOS

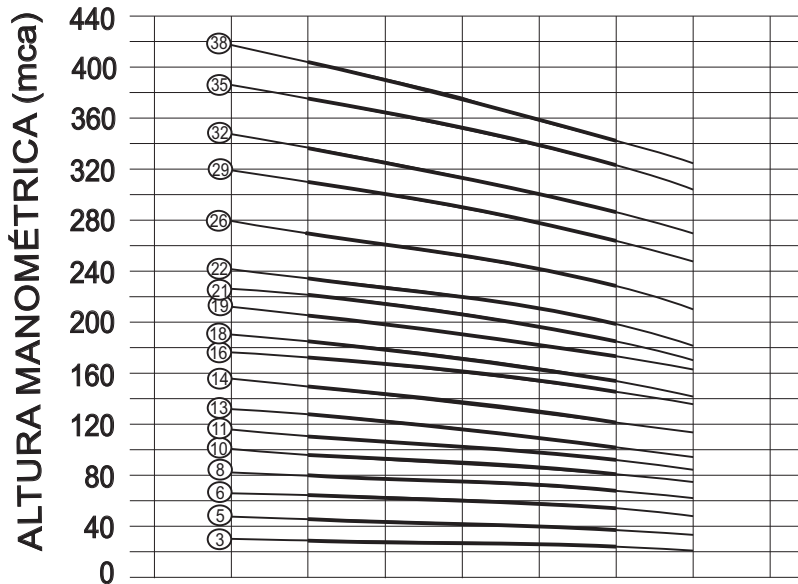

○ N° ETAPAS

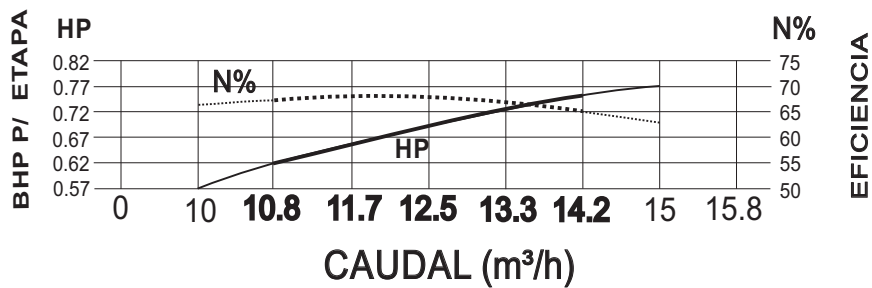

MODELO	MOTOR	E	HP	CAUDAL Y ALTURA MANOMÉTRICA TOTAL											m³/h
				0	10	10.8	11.7	12.5	13.3	14.2	15	15.8			
VBOP.64X.03.025.Y	VMUP	3	2.5	37.5	30.3	28.9	27.6	26.6	24.6	23.0	21.1	21.9	METROS		
VBOP.64X.05.035.Y	VMUP	5	3.5	57.3	48.3	46.4	44.6	42.8	40.4	38.0	35.5	32.1			
VBOP.64X.06.050.Y	VMUP	6	5.0	76.9	66.1	64.0	61.5	59.1	56.3	53.0	49.3	45.9			
VBOP.64X.08.060.Y	VMUP	8	6.0	96.7	83.1	80.4	77.7	74.7	71.1	67.1	62.8	57.5			
VBOP.64X.10.070.Y	VMUP	10	7.0	117.0	100.1	97.0	93.7	90.2	86.0	81.1	75.9	69.3			
VBOP.64X.11.090.Y	VMUP	11	9.0	134.1	114.6	110.8	106.4	101.9	96.9	91.0	84.9	77.3			
VBOP.64X.13.100.Y	VMUP	13	10.0	152.6	132.6	127.9	123.2	116.5	109.9	102.4	95.4	86.5			
VBOP.64X.14.110.Y	VMUP	14	11.0	173.9	154.3	150.2	145.1	138.8	131.7	123.8	116.1	106.4			
VBOP.64X.16.120.Y	VMUP	16	12.0	197.5	176.3	172.4	166.9	161.2	153.5	145.2	136.8	126.5			
VBOP.64X.18.130.Y	VMUP	18	13.0	213.0	189.3	184.4	177.7	170.2	160.9	152.2	142.0	130.0			
VBOP.64X.19.140.Y	VMUP	19	14.0	235.4	211.5	205.8	199.2	190.1	181.9	172.7	161.8	145.8			
VBOP.64X.21.160.Y	VMSP	21	16.0	250.6	227.3	220.6	214.1	205.0	194.9	186.6	171.8	153.5			
VBOP.64X.22.170.Y	VMSP	22	17.0	265.7	243.1	235.4	228.9	220.3	208.1	196.4	181.8	161.3			
VBOP.64X.26.190.Y	VMSP	26	19.0	302.4	279.0	272.6	264.1	253.3	240.4	227.7	210.4	192.1			
VBOP.64X.29.225.Y	VMSP	29	22.5	349.8	318.9	308.0	299.5	288.6	277.2	264.0	247.0	222.0			
VBOP.64X.32.250.Y	VMSP	32	25.0	382.9	347.5	336.5	326.0	314.2	299.4	286.0	270.9	249.0			
VBOP.64X.35.275.Y	VMSP	35	27.5	425.9	387.0	375.3	365.8	353.5	340.3	322.5	304.2	277.6			
VBOP.64X.38.300.Y	VMSP	38	30.0	459.5	417.0	403.8	391.2	377.0	359.4	341.6	325.2	298.9			