



BOMBAS VANBRO LTDA


SAPUCAIA DO SUL - RS

BRASIL


BOMBA SUMERGIBLE MODELO VBSP62

EMPLEO: POZO PROFUNDO Ø6"
(DIÁM. 140mm 50HZ 2900RPM)

TABLA DE RENDIMIENTOS

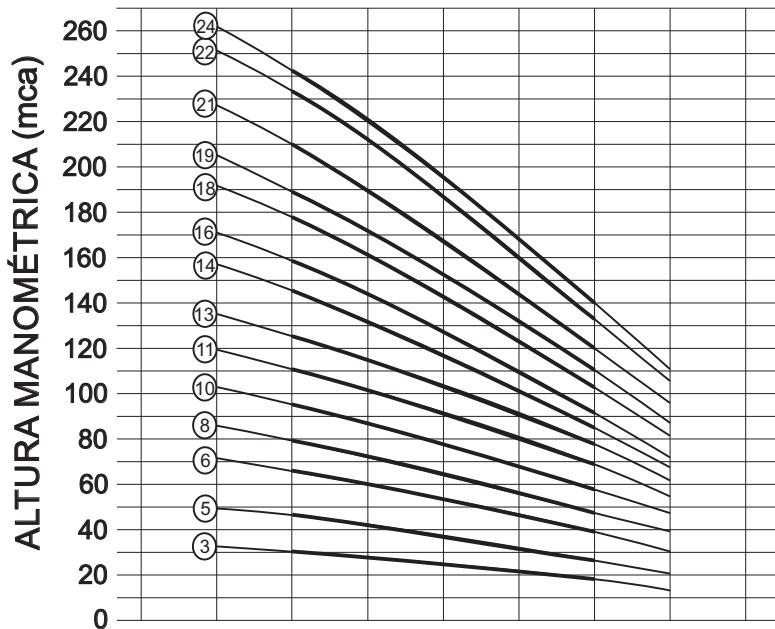

○ N° DE ETAPAS

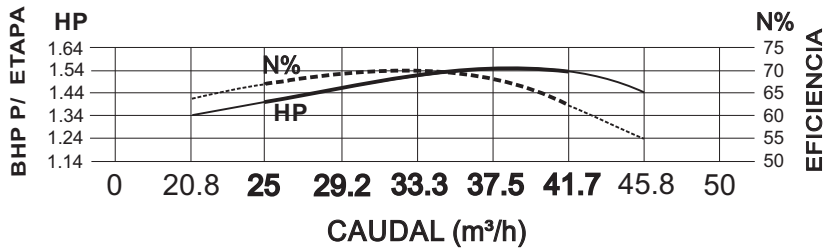

MODELO	MOTOR	E	HP	CAUDAL Y ALTURA MANOMÉTRICA TOTAL										m³/h
				0	20.8	25	29.2	33.3	37.5	41.7	45.8	50		
VBSP.62X.03.050.Y	VMSP	3	5.0	44.1	32.9	30.4	27.9	24.6	21.5	17.8	13.9	9.9	METROS	
VBSP.62X.05.080.Y	VMSP	5	8.0	64.9	49.4	45.7	41.6	37.0	32.1	26.7	21.0	14.9		
VBSP.62X.06.100.Y	VMSP	6	10.0	88.6	72.1	65.1	60.6	53.9	46.8	39.1	30.6	21.6		
VBSP.62X.08.130.Y	VMSP	8	13.0	110.0	85.5	78.9	71.8	64.2	56.3	47.3	38.8	29.4		
VBSP.62X.10.150.Y	VMSP	10	15.0	132.9	103.5	95.5	87.0	77.1	68.2	57.9	47.0	35.6		
VBSP.62X.11.180.Y	VMSP	11	18.0	154.0	119.7	110.9	101.4	91.5	81.0	69.7	54.7	38.9		
VBSP.62X.13.200.Y	VMSP	13	20.0	175.0	135.3	125.4	114.7	103.5	91.6	79.0	61.8	44.0		
VBSP.62X.14.225.Y	VMSP	14	22.5	202.0	157.0	145.4	131.2	116.7	101.2	84.3	66.6	48.2		
VBSP.62X.16.250.Y	VMSP	16	25.0	222.2	171.1	157.6	143.0	127.2	110.2	91.9	72.5	52.5		
VBSP.62X.18.275.Y	VMSP	18	27.5	246.7	191.8	177.0	160.4	142.7	123.5	103.1	81.4	58.7		
VBSP.62X.19.300.Y	VMSP	19	30.0	266.5	205.3	189.3	171.6	152.6	132.2	110.2	87.1	62.9		
VBSP.62X.21.325.Y	VMSP	21	32.5	291.0	226.8	209.1	189.5	168.5	146.1	121.8	96.1	69.5		
VBSP.62X.22.350.Y	VMSP	22	35.0	310.8	251.5	231.9	210.2	186.9	162.0	135.0	106.6	77.1		
VBSP.62X.24.375.Y	VMSP	24	37.5	336.5	261.7	241.3	218.8	194.6	168.5	140.5	111.0	80.2		